



ISOTUBE® 040

ISOTUBE® 040 is a PU foam insulation material protected by a special PVC sheet with a superior appearance.

- Professional thermal insulation for energy savings of up to 80%
- Improvement of the economic and ecological efficiency of the entire unit
- High-quality appearance
- We offer appropriate elbow joints for every diameter
- Protects the foam against any damage
- Easy to install

Product features

- Thermal conductivity (EN ISO 8497):
0,033 W/mK at 10°C
0,037 W/mK at 40°C
0,042 W/mK at 70°C
- Fire performance: Euroclass E (EN 13501-1)
- Temperature range: 0°C to +110°C (EN 14707)
- Working temperature: $\geq +5^{\circ}\text{C}$

Application area

- Heating and plumbing



NMC (uk) Ltd.


Tafarnaubach Industrial Estate · UK · NP22 3AA Tredgard, South Wales

Phone: +44 1495 713266 · Fax: +44 1495 713277

Email: enquiries@nmc-uk.com

www.nmc-insulation.com

nmc

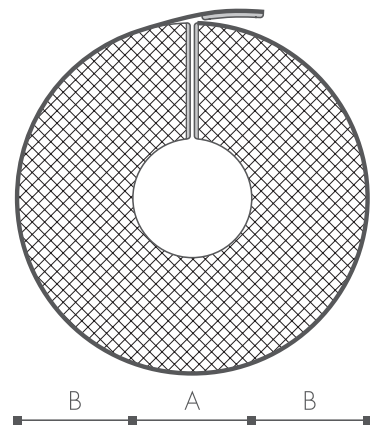

Product range

Copper CU		Steel FE			Synthetics MSV & PEX		Type	A mm	B mm	Length m	Packaging unit
NW DN	Outer Ø mm	NW DN	Outer Ø mm	inch	Outer Ø mm	EnEV					
10	15	8	13,5	1/4	-	50%	15 x 20	15	20	1 m	63 m
15	18	10	17,2	3/8	16	50%	18 x 20	18	20	1 m	63 m
20	22	15	21,3	1/2	20	50%	22 x 20	22	20	1 m	55 m
25	28	20	26,9	3/4	25	50%	28 x 20	28	20	1 m	48 m
32	35	25	33,7	1	32	50%	35 x 20	35	20	1 m	36 m
40	42	32	42,4	1 1/4	40	50% Fe	42 x 20	42	20	1 m	28 m
-	-	40	48,3	1 1/2	-	-	48 x 20	48	20	1 m	24 m
-	-	50	60,3	2	-	-	60 x 20	60	20	1 m	22 m
65	76,1	65	76,1	2 1/2	-	-	76 x 20	76	20	1 m	14 m
80	88,9	80	88,9	3	-	-	89 x 20	89	20	1 m	12 m
40	42	32	42,4	1 1/4	40	50%	42 x 25	42	25	1 m	24 m
-	-	40	48,3	1 1/2	-	50%	48 x 25	48	25	1 m	20 m
-	-	50	60,3	2	-	50%	60 x 30	60	30	1 m	14 m